

HEWLETT-PACKARD

HP-33E
MATHEMATICS
Applications


HEWLETT  PACKARD

1000 N.E. Circle Blvd., Corvallis, OR 97330

For additional sales and service information contact your
local Hewlett-Packard Sales Office or call 800/648-4711.
(In Nevada call 800/992-5710.)

00033-90030

Printed in U.S.A.

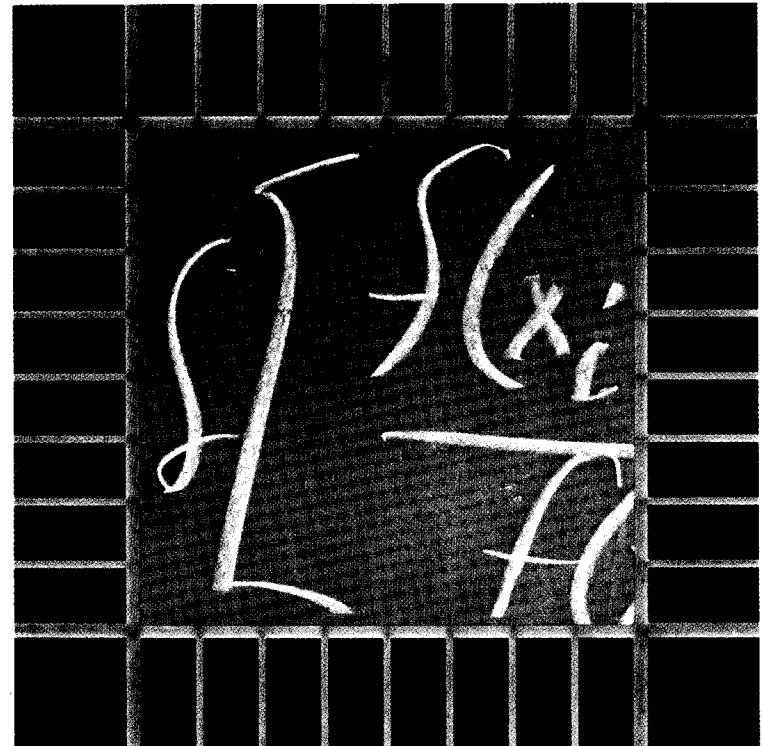



HP-33E

Mathematics Applications

February, 1978

The material contained herein is supplied without representation or warranty of any kind. Hewlett-Packard Company therefore assumes no responsibility and shall have no liability, consequential or otherwise, of any kind arising from the use of keystroke procedures or any part thereof.

00033-90030

Introduction

This Mathematics Applications book was written to help you get the most from your HP-33E calculator. The programs were chosen to provide useful calculations for many of the common problems encountered in mathematics.

They will provide you with immediate capabilities in your everyday calculations and you will find them useful as guides to programming techniques for writing your own customized software.

You will find general information on how to key in and run programs under "A Word about Program Usage" in the Applications book you received with your calculator.

We hope that this Mathematics Applications book will be a valuable tool in your work and would appreciate your comments about it.

Contents

Introduction	2
Algebra and Number Theory	4
Quadratic Equation	4
Complex Arithmetic (+, −, ×, ÷)	7
Complex Functions ($ z $, z^n , and $z^{1/n}$)	10
Determinant and Inverse of a 2×2 Matrix	13
Simultaneous Equations in 2 Unknowns	16
Number in Base b to Number in Base 10	18
Number in Base 10 to Number in Base b	20
Vector Cross Product	23
Angle Between, Norm, and Dot Product of Vectors	25
Numerical Methods	28
Newton's Method Solution to $f(x) = 0$	28
Numerical Integration, Simpson's Rule	32
Analytical Geometry	35
Hyperbolic Functions	35
Inverse Hyperbolic Functions	38
Circle Determined by Three Points	41
Intersection of Line and Line	45

Algebra and Number Theory

Quadratic Equation

The roots x_1, x_2 of

$$ax^2 + bx + c = 0$$

are given by

$$x_{1,2} = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

If

$$D = (b^2 - 4ac)/4a^2$$

is positive or zero, the roots are real. In these cases, better accuracy may sometimes be obtained by first calculating the root with the larger absolute value:

If

$$-\frac{b}{2a} \geq 0, \quad x_1 = -\frac{b}{2a} + \sqrt{D}$$

If

$$-\frac{b}{2a} < 0, \quad x_1 = -\frac{b}{2a} - \sqrt{D}$$

In either case,

$$x_2 = \frac{c}{x_1 a}$$

If $D < 0$, the roots are complex, being

$$u \pm iv = \frac{-b}{2a} \pm \frac{\sqrt{4ac - b^2}}{2a} i$$

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
f CLEAR PRGM	00	x₂y	19- 21
ENTER +	01- 31	g x<0	20- 15 41
R +	02- 22	GTO 24	21- 13 24
÷	03- 71	+	22- 51
2	04- 2	GTO 26	23- 13 26
÷	05- 71	x₂y	24- 21
CHS	06- 32	-	25- 41
ENTER +	07- 31	R/S	26- 74
g x²	08- 15 0	g 1/x	27- 15 3
R +	09- 22	RCL 0	28- 24 0
R +	10- 22	x	29- 61
x₂y	11- 21	GTO 00	30- 13 00
÷	12- 71	CHS	31- 32
STO 0	13- 23 0	f √x	32- 14 0
-	14- 41	x₂y	33- 21
f PAUSE	15- 14 74	R/S	34- 74
g x<0	16- 15 41	x₂y	35- 21
GTO 31	17- 13 31	GTO 00	36- 13 00
f √x	18- 14 0		

REGISTERS			
R ₀ c/a	R ₁	R ₂	R ₃
R ₄	R ₅	R ₆	R ₇

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program			
2	Initialize		f PRGM	
3	Enter coefficients and display D	c	ENTER*	
		b	ENTER*	
		a	R/S	(D)
4	If $D \geq 0$, roots are real		R/S	x_1
	or			x_2
	If $D < 0$, roots are complex of form $u \pm iv$		R/S	u
				v
5	For new case, go to step 3.			

Example:

- $x^2 + x - 6 = 0$ ($D = 6.2500$, $x_1 = -3.0000$, $x_2 = 2.0000$)
- $3x^2 + 2x - 1 = 0$ ($D = 0.4444$, $x_1 = -1.0000$, $x_2 = 0.3333$)
- $2x^2 - 3x + 5 = 0$ ($D = -1.9375$, $x_1, x_2 = 0.7500 \pm 1.3919i$)

Keystrokes**Display****f** **PRGM**6 **CHS** **ENTER*** 1**ENTER*** 1 **R/S****-3.0000****R/S****2.0000**1 **CHS** **ENTER*** 2**ENTER*** 3 **R/S****-1.0000****R/S****0.3333**5 **ENTER*** 3 **CHS****ENTER*** 2 **R/S****0.7500****R/S****1.3919****Complex Arithmetic (+, −, ×, ÷)**

Let $a_1 + ib_1$ and $a_2 + ib_2$ be two complex numbers. The arithmetic operations $+$, $-$, $\times$, $\div$ are defined as follows:

- 1.
- $+$
- , addition

$$(a_1 + ib_1) + (a_2 + ib_2) = (a_1 + a_2) + (b_1 + b_2)i$$

- 2.
- $-$
- , subtraction

$$(a_1 + ib_1) - (a_2 + ib_2) = (a_1 - a_2) + (b_1 - b_2)i$$

- 3.
- $\times$
- , multiplication

$$(a_1 + ib_1) \times (a_2 + ib_2) = r_1 r_2 e^{i(\theta_1 + \theta_2)}$$

- 4.
- $\div$
- , division

$$\frac{(a_1 + ib_1)}{(a_2 + ib_2)} = \frac{r_1}{r_2} e^{i(\theta_1 - \theta_2)}, a_2 + ib_2 \neq 0$$

where $r_1 e^{i\theta_1}$ is the polar representation of $a_1 + ib_1$ and $r_2 e^{i\theta_2}$ is the polar representation of $a_2 + ib_2$. In each case let the answer be $x + iy$.

After a calculation is finished x is stored in R_0 as well as the X-register and y is stored in R_1 as well as the Y-register. In this way arithmetic operations can be chained together.

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
f CLEAR PRGM	00	g →P	17- 15 4
CHS	01- 32	STO 2	18- 23 2
x₂y	02- 21	R*	19- 22
CHS	03- 32	RCL 1	20- 24 1
x₂y	04- 21	RCL 0	21- 24 0
RCL 0	05- 24 0	g →P	22- 15 4
+	06- 51	STO x 2	23- 23 61 2
x₂y	07- 21	R*	24- 22
RCL 1	08- 24 1	+	25- 51
+	09- 51	RCL 2	26- 24 2
GTO 29	10- 13 29	f →R	27- 14 4
g →P	11- 15 4	x₂y	28- 21
g 1/x	12- 15 3	STO 1	29- 23 1
x₂y	13- 21	x₂y	30- 21
CHS	14- 32	STO 0	31- 23 0
x₂y	15- 21	GTO 00	32- 13 00
GTO 18	16- 13 18		

REGISTERS

R ₀ a ₁ , x	R ₁ b ₁ , y	R ₂ Used	R ₃
R ₄	R ₅	R ₆	R ₇

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program			
2	Store first complex number	b ₁	STO 1	
		a ₁	STO 0	
3	Key in next number	b ₂	ENTER*	
		a ₂		
4	For addition		GSB 05	a ₁ + a ₂
	or			
	subtraction		GSB 01	a ₁ - a ₂
	or			
	multiplication		GSB 17	a ₁ a ₂ - b ₁ b ₂
	or			
	division		GSB 11	Real Part
5	For imaginary part		x₂y	Imaginary
6	For next calculation in chain, go to step 3.			
7	For new case, go to step 2.			

Examples:

$$1. (1.2 + 3.7i) - (2.6 - 1.9i) = -1.4 + 5.6i$$

$$2. \frac{3 + 4i}{7 - 2i} = 0.2453 + 0.6415i$$

$$3. \left[\frac{(3 + 4i) + (7.4 - 5.6i)}{(7 - 2i)} \right] [3.1 + 4.6i] = 3.6121 + 7.1577i$$

Keystrokes

Display

3.7 **STO** 11.2 **STO** 01.9 **CHS** **ENTER*** 2.6**GSB** 01

-1.4000

x₂y

5.6000

Keystrokes Display

4 **[STO]** 1
 3 **[STO]** 0
 2 **[CHS]** **[ENTER+]** 7
[GSB] 11 **0.2453**
[x²y] **0.6415**
 4 **[STO]** 1
 3 **[STO]** 0
 5.6 **[CHS]** **[ENTER+]** 7.4
[GSB] 05
 2 **[CHS]** **[ENTER+]** 7
[GSB] 11
 4.6 **[ENTER+]**
 3.1 **[GSB]** 17 **3.6121**
[x²y] **7.1577**

Complex Functions ($|z|$, z^n , and $z^{1/n}$)

A complex number $z = x + iy$ has polar representation $r e^{i\theta}$. The formulas used to evaluate the given functions are as follows:

$$|z| = r = \sqrt{x^2 + y^2}$$

$$z^n = r^n e^{in\theta} \quad n = \pm(1, 2, 3, \dots)$$

$$z^{1/n} = r^{1/n} e^{i\left(\frac{\theta}{n} + \frac{360k}{n}\right)}, k = 0, 1, \dots, n-1$$

The answer is represented by $u + iv$

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
[f] CLEAR [PRGM]	00	[RCL] 3	21- 24 3
[RCL] 2	01- 24 2	[÷]	22- 71
[RCL] 1	02- 24 1	3	23- 3
[9] [→P]	03- 15 4	6	24- 6
[9] [RTN]	04- 15 12	0	25- 0
[STO] 3	05- 23 3	[RCL] 0	26- 24 0
[GSB] 01	06- 12 01	[x]	27- 61
[RCL] 3	07- 24 3	[RCL] 3	28- 24 3
[f] [y^x]	08- 14 3	[÷]	29- 71
[STO] 5	09- 23 5	[+]	30- 51
[x²y]	10- 21	[x²y]	31- 21
[RCL] 3	11- 24 3	[f] [→R]	32- 14 4
[x]	12- 61	[R/S]	33- 74
[STO] 4	13- 23 4	1	34- 1
[GTO] 38	14- 13 38	[STO] [+] 0	35- 23 51 0
[STO] 3	15- 23 3	[RCL] 3	36- 24 3
[GSB] 01	16- 12 01	[GTO] 16	37- 13 16
[RCL] 3	17- 24 3	[RCL] 5	38- 24 5
[9] [1/x]	18- 15 3	[f] [→R]	39- 14 4
[f] [y^x]	19- 14 3	[GTO] 00	40- 13 00
[x²y]	20- 21		

REGISTERS

R ₀ index	R ₁ x	R ₂ y	R ₃ n
R ₄ n θ	R ₅ r ⁿ	R ₆	R ₇

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program.			
2	Input the complex number			
	$z = x + iy$	x	[STO] 1	
		y	[STO] 2	
3	Select one of the 3 functions:			
	• Magnitude $ z $		[GSB] 01	$ z $
	• z^n	n	[GSB] 05	u
			[x ₂ y]	v
	• $z^{1/n}$	0	[STO] 0	
		n	[GSB] 15	u_1
			[x ₂ y]	v_1
			[R/S]	u_2
			[x ₂ y]	v_2
			.	.
			.	.
			[R/S]	u_n
			[x ₂ y]	v_n
4	For a new complex number			
	go to step 2.			

Examples:

- $|12 - 5i| = 13.00$
- $(6 - i)^2 = 35.00 - 12.00i$
- $\frac{1}{2 + 5i} = 0.0690 - 0.1724i$
- $\sqrt{3 + 4i} = \pm (2.00 + 1.00i)$

Keystrokes**Display**

```

12 [STO] 1
5 [CHS] [STO] 2
[GSB] 01          13.0000
6 [STO] 1
1 [CHS] [STO] 2
2 [GSB] 05        35.0000
[x2y]            -12.0000
2 [STO] 1
5 [STO] 2
1 [CHS] [GSB] 05  0.0690
[x2y]            -0.1724
3 [STO] 1
4 [STO] 2
0 [STO] 0
2 [GSB] 15        2.0000
[x2y]            1.0000
[R/S]             -2.0000
[x2y]            -1.0000

```

Determinant and Inverse of a 2×2 Matrix

Let $A = \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix}$ be a 2×2 matrix.

The determinant of A denoted by $\text{Det } A$ or $|A|$ is evaluated by the following formula:

$$\text{Det } A = a_{22} a_{11} - a_{12} a_{21}$$

Also, the program evaluates the multiplicative inverse A^{-1} of A. The following formula is used: (A^{-1} exists only when $|A| \neq 0$).

$$A^{-1} = \begin{bmatrix} a_{22}/\text{Det } A & -a_{12}/\text{Det } A \\ -a_{21}/\text{Det } A & a_{11}/\text{Det } A \end{bmatrix} = A'$$

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
f CLEAR PRGM	00	RCL 2	14- 24 2
RCL 4	01- 24 4	RCL 0	15- 24 0
RCL 1	02- 24 1	+	16- 71
x	03- 61	CHS	17- 32
RCL 2	04- 24 2	R/S	18- 74
RCL 3	05- 24 3	RCL 3	19- 24 3
x	06- 61	RCL 0	20- 24 0
-	07- 41	÷	21- 71
STO 0	08- 23 0	CHS	22- 32
R/S	09- 74	R/S	23- 74
RCL 4	10- 24 4	RCL 1	24- 24 1
RCL 0	11- 24 0	RCL 0	25- 24 0
±	12- 71	÷	26- 71
R/S	13- 74	GTO 00	27- 13 00

REGISTERS

R ₀ Det A	R ₁ a ₁₁	R ₂ a ₁₂	R ₃ a ₂₁
R ₄ a ₂₂	R ₅	R ₆	R ₇

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program.			
2	Store matrix	a ₁₁	STO 1	
		a ₁₂	STO 2	
		a ₂₁	STO 3	
		a ₂₂	STO 4	
3	Calculate the determinant		GSB 01	Det A
4	Calculate the inverse		R/S	a ₁₁ '
			R/S	a ₁₂ '
			R/S	a ₂₁ '
			R/S	a ₂₂ '
5	For new case, go to step 2.			

Example:

Find the determinant and inverse of the matrix.

$$A = \begin{bmatrix} 3 & 2 \\ 4 & -4 \end{bmatrix}$$

Solution:

$$\text{Det } A = -20$$

$$A^{-1} = \begin{bmatrix} 0.20 & 0.10 \\ 0.20 & -0.15 \end{bmatrix}$$

Keystrokes

3 **STO** 1
 2 **STO** 2
 4 **STO** 3
 4 **CHS** **STO** 4
GSB 01
R/S
R/S
R/S
R/S

Display

-20.0000
 0.2000
 0.1000
 0.2000
 -0.1500

Simultaneous Equations in Two Unknowns

Let $ax + by = e$

and $cx + dy = f$

be a system of two equations in two unknowns. Cramer's Rule is used to find the solution.

$$x = \frac{\begin{vmatrix} e & b \\ f & d \end{vmatrix}}{\begin{vmatrix} a & b \\ c & d \end{vmatrix}} = \frac{ed - bf}{ad - bc} \quad y = \frac{\begin{vmatrix} a & e \\ c & f \end{vmatrix}}{\begin{vmatrix} a & b \\ c & d \end{vmatrix}} = \frac{af - ec}{ad - bc}$$

If $ad - bc = 0$ the calculator displays *Error 0*. In this case no solution or no unique solution exists.

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
[F] CLEAR [PRGM]	00	[+/-]	14- 41
[RCL] 3	01- 24 3	[STO] 0	15- 23 0
[RCL] 5	02- 24 5	[+]	16- 71
[x]	03- 61	[R/S]	17- 74
[RCL] 2	04- 24 2	[RCL] 1	18- 24 1
[RCL] 6	05- 24 6	[RCL] 6	19- 24 6
[x]	06- 61	[x]	20- 61
[+/-]	07- 41	[RCL] 3	21- 24 3
[RCL] 1	08- 24 1	[RCL] 4	22- 24 4
[RCL] 5	09- 24 5	[x]	23- 61
[x]	10- 61	[+/-]	24- 41
[RCL] 2	11- 24 2	[RCL] 0	25- 24 0
[RCL] 4	12- 24 4	[+]	26- 71
[x]	13- 61	[GTO] 00	27- 13 00

REGISTERS			
R ₀ ad - bc	R ₁ a	R ₂ b	R ₃ e
R ₄ c	R ₅ d	R ₆ f	R ₇

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program.			
2	Store constants	a	[STO] 1	
		b	[STO] 2	
		e	[STO] 3	
		c	[STO] 4	
		d	[STO] 5	
		f	[STO] 6	
3	Find x and y		[GSB] 01	x
			[R/S]	y
4	For new case, go to step 2.			

Example:

$$5x - 3y = 12$$

$$2x + y = 9$$

Solution:

$$x = 3.5455$$

$$y = 1.9091$$

Keystrokes

5 **[STO] 1**
 3 **[CHS] [STO] 2**
 12 **[STO] 3**
 2 **[STO] 4**
 1 **[STO] 5**
 9 **[STO] 6 [GSB] 01**
[R/S]

Display

3.5455
1.9091

Number in Base b to Number in Base 10

This program consists of two subprograms. The first changes the integer part of a number in base b to a number in base 10.

$$I_{10} = i_n i_{n-1} \dots i_2 i_1 = i_n b^{n-1} + i_{n-1} b^{n-2} + \dots + i_2 b + i_1$$

This is evaluated in the form

$$b (\dots (b (i_n b + i_{n-1}) + i_{n-2}) + \dots) + i_2) + i_1$$

The second subprogram changes the fraction part of a number in base b to a number in base 10.

$$F_{10} = f_1 f_2 \dots f_m = f_1 b^{-1} + f_2 b^{-2} + \dots + f_m b^{-m}$$

Together the two programs can convert any number in base b to a number in base 10. Zeros must be entered in their proper place.

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
f CLEAR PRGM	00	GTO 07	14- 13 07
STO 1	01- 23 1	RCL 0	15- 24 0
RCL 0	02- 24 0	g $\sqrt{x}$	16- 15 3
ENTER*	03- 31	STO 2	17- 23 2
ENTER*	04- 31	STO 3	18- 23 3
ENTER*	05- 31	x	19- 61
RCL 1	06- 24 1	R/S	20- 74
R/S	07- 74	RCL 2	21- 24 2
STO 1	08- 23 1	RCL 3	22- 24 3
CLX	09- 34	x	23- 61
+	10- 51	STO 3	24- 23 3
x	11- 61	x	25- 61
RCL 1	12- 24 1	+	26- 51
+	13- 51	GTO 20	27- 13 20

REGISTERS			
R_0 b	R_1 Used	R_2 b^{-1}	R_3 b^{-i}
R_4	R_5	R_6	R_7

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program.			
2	Store base	b	STO 0	
3	For integer part, input left most digit	i_n	GSB 01	
4	Perform for $j = n-1, \dots, 2$: Input next digit	i_j^*	R/S	
5	Input final digit	i_1^*	R/S	I_{10}
6	For fractional part, input digit after decimal	f_1	GSB 15	
7	Perform for $i = 2, \dots, m-1$: Input next digit	f_i^*	R/S	
8	Input final digit	f_m^*	R/S	F_{10}
9	For new case, go to step 2. * The stack must be maintained at these points.			

Examples:

- $1777_8 = 1023_{10}$
- $143.2044_5 = 48.4384_{10}$

Keystrokes	Display
8 STO 0	
1 GSB 01	
7 R/S 7 R/S	
7 R/S	1,023.0000
5 STO 0	
1 GSB 01	
4 R/S 3 R/S	48.0000
2 GSB 15	
0 R/S 4 R/S	
4 R/S	0.4384

Number in Base 10 to Number in Base b

This program will convert any positive number in base 10, N_{10} , to a number in base b , N_b , where $2 \leq b \leq 100$. The algorithm used is an iterative one which adds one more digit to N_b at each iteration. The program pauses as each new N_b is calculated to display successive approximations to the final answer. When the displayed value of N_b has reached the accuracy desired by the user, he should press $\boxed{\text{R/S}}$ to halt the program, then $\boxed{\text{RCL}} \ 3$ to display N_b .

Notes:

1. When the base b is such that $11 \leq b \leq 100$, two display positions are allocated to each digit of N_b . Begin partitioning to the right and to the left of the decimal point. For example, 41106.12 in base 16 stands for 4B6.C.
2. If the calculation is terminated with all 9's on the display, it means the machine is overflowed and the range of machine has been exceeded.

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
$\boxed{\text{f CLEAR}} \boxed{\text{PRGM}}$	00	$\boxed{\text{GTO}} \ 23$	20- 13 23
$\boxed{\text{RCL}} \ 0$	01- 24 0	$\boxed{9} \boxed{\text{INT}}$	21- 15 32
1	02- 1	$\boxed{\text{GTO}} \ 26$	22- 13 26
0	03- 0	$\boxed{9} \boxed{\text{INT}}$	23- 15 32
$\boxed{\text{f}} \boxed{\text{X} > \text{Y}}$	04- 14 51	1	24- 1
$\boxed{\text{GTO}} \ 11$	05- 13 11	$\boxed{-}$	25- 41
$\boxed{\text{f}} \boxed{\text{X} = \text{Y}}$	06- 14 71	$\boxed{\text{STO}} \ 4$	26- 23 4
$\boxed{\text{GTO}} \ 11$	07- 13 11	$\boxed{\text{RCL}} \ 2$	27- 24 2
1	08- 1	$\boxed{\text{X} \div \text{Y}}$	28- 21
0	09- 0	$\boxed{\text{f}} \boxed{\text{Y}^x}$	29- 14 3
0	10- 0	$\boxed{\text{RCL}} \ 3$	30- 24 3
$\boxed{\text{STO}} \ 2$	11- 23 2	$\boxed{+}$	31- 51
0	12- 0	$\boxed{\text{STO}} \ 3$	32- 23 3
$\boxed{\text{STO}} \ 3$	13- 23 3	$\boxed{\text{f}} \boxed{\text{PAUSE}}$	33- 14 74
$\boxed{\text{RCL}} \ 1$	14- 24 1	$\boxed{\text{f}} \boxed{\text{PAUSE}}$	34- 14 74
$\boxed{\text{f}} \boxed{\text{LN}}$	15- 14 1	$\boxed{\text{RCL}} \ 0$	35- 24 0
$\boxed{\text{RCL}} \ 0$	16- 24 0	$\boxed{\text{RCL}} \ 4$	36- 24 4
$\boxed{\text{f}} \boxed{\text{LN}}$	17- 14 1	$\boxed{\text{f}} \boxed{\text{Y}^x}$	37- 14 3
$\boxed{\div}$	18- 71	$\boxed{\text{STO}} \ \boxed{-} \ 1$	38- 23 41 1
$\boxed{9} \boxed{\text{X} < 0}$	19- 15 41	$\boxed{\text{GTO}} \ 14$	39- 13 14

REGISTERS			
$R_0 \ b$	$R_1 \ N_{10}$	$R_2 \ 10 \text{ or } 100$	$R_3 \ N_b$
$R_4 \ 1 \text{ digit}$	R_5	R_6	R_7

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program.			
2	Set display format		f FIX 9	
3	Store base and decimal number	b	STO 0	
		N_{10}	STO 1 GSB 01	
4	Display successive approximations to N_b .			(N_b)
5	When number is shown with desired accuracy, press R/S to halt, then		RCL 3	N_b
6	For new case, go to step 3.			

Examples:

- $67.32_{10} = 403.050114_{16}$
 $= 43.51E_{16}$
- $\pi = 3.141592654_{10} = 11.00100100_2$

Keystrokes**Display**

f **FIX** 9
 16 **STO** 0
 67.32 **STO** 1
GSB 01
R/S **RCL** 3
 2 **STO** 0 **9** **π**
STO 1
GSB 01
R/S **RCL** 3

403.0501140 (Pause)
403.0501140

11.00100100 (Pause)
11.00100100

Vector Cross Product

If $A = (a_1, a_2, a_3)$ and $B = (b_1, b_2, b_3)$ are two three dimensional vectors then the cross product of A and B is denoted by $A \times B$ and is calculated as follows:

$$A \times B = \begin{pmatrix} \begin{vmatrix} a_2 & a_3 \\ b_2 & b_3 \end{vmatrix}, -\begin{vmatrix} a_1 & a_3 \\ b_1 & b_3 \end{vmatrix}, \begin{vmatrix} a_1 & a_2 \\ b_1 & b_2 \end{vmatrix} \end{pmatrix} =$$

$$(a_2 b_3 - a_3 b_2, a_3 b_1 - a_1 b_3, a_1 b_2 - a_2 b_1)$$

Let the solution be represented by (c_1, c_2, c_3) .

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
f CLEAR PRGM	00	RCL 6	13- 24 6
RCL 2	01- 24 2	x	14- 61
RCL 6	02- 24 6	=	15- 41
x	03- 61	R/S	16- 74
RCL 3	04- 24 3	RCL 1	17- 24 1
RCL 5	05- 24 5	RCL 5	18- 24 5
x	06- 61	x	19- 61
=	07- 41	RCL 2	20- 24 2
R/S	08- 74	RCL 4	21- 24 4
RCL 3	09- 24 3	x	22- 61
RCL 4	10- 24 4	=	23- 41
x	11- 61	GTO 00	24- 13 00
RCL 1	12- 24 1		

REGISTERS

R_0	$R_1 \ a_1$	$R_2 \ a_2$	$R_3 \ a_3$
$R_4 \ b_1$	$R_5 \ b_2$	$R_6 \ b_3$	R_7

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program.			
2	Store A	a_1	[STO] 1	
		a_2	[STO] 2	
		a_3	[STO] 3	
3	Store B	b_1	[STO] 4	
		b_2	[STO] 5	
		b_3	[STO] 6	
4	Calculate cross product		[GSB] 01	c_1
			[R/S]	c_2
			[R/S]	c_3
5	For new case, go to step 2.			

Example:

Let $A = (2, 5, 2)$
 $B = (3, 3, -4)$.

Solution:

$A \times B = (-26, 14, -9)$

Keystrokes

[f] **[FIX]** 2
 2 **[STO]** 1
 5 **[STO]** 2
 2 **[STO]** 3
 3 **[STO]** 4
 3 **[STO]** 5
 4 **[CHS]** **[STO]** 6
[GSB] 01
[R/S]
[R/S]

Display

-26.00
 14.00
 -9.00

**Angle Between, Norm,
and Dot Product of Vectors**

Let $\vec{a} = (a_1, a_2, \dots, a_n)$ and $\vec{b} = (b_1, b_2, \dots, b_n)$ be two vectors.

The norm of $\vec{a}$ is denoted by $|\vec{a}|$ and is calculated by the following formula:

$$|\vec{a}| = \sqrt{a_1^2 + a_2^2 + \dots + a_n^2}$$

similarly,

$$|\vec{b}| = \sqrt{b_1^2 + b_2^2 + \dots + b_n^2}$$

The dot product of $\vec{a}$ and $\vec{b}$ is denoted by $\vec{a} \cdot \vec{b}$ and is calculated by the following formula:

$$\vec{a} \cdot \vec{b} = a_1 b_1 + a_2 b_2 + \dots + a_n b_n$$

The angle between $\vec{a}$ and $\vec{b}$ is denoted by θ and is calculated by the following formula:

$$\theta = \cos^{-1} \left(\frac{\vec{a} \cdot \vec{b}}{|\vec{a}| \cdot |\vec{b}|} \right)$$

The angle is calculated in any angular mode. When calculated in degrees, decimal degrees are assumed.

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
$\boxed{\text{f}} \boxed{\text{CLEAR}} \boxed{\text{PRGM}}$	00	$\boxed{\text{STO}} \boxed{+} 2$	11- 23 51 2
$\boxed{\text{ENTER}} \blacktriangleleft$	01- 31	$\boxed{\text{GTO}} 00$	12- 13 00
$\boxed{9} \boxed{x^2}$	02- 15 0	$\boxed{\text{RCL}} 2$	13- 24 2
$\boxed{\text{STO}} \boxed{+} 1$	03- 23 51 1	$\boxed{\text{RCL}} 0$	14- 24 0
$\boxed{\text{R}} \blacktriangleleft$	04- 22	$\boxed{\text{RCL}} 1$	15- 24 1
$\boxed{x \div y}$	05- 21	$\boxed{\times}$	16- 61
$\boxed{\text{ENTER}} \blacktriangleleft$	06- 31	$\boxed{\text{f}} \boxed{\sqrt{x}}$	17- 14 0
$\boxed{9} \boxed{x^2}$	07- 15 0	$\boxed{\div}$	18- 71
$\boxed{\text{STO}} \boxed{+} 0$	08- 23 51 0	$\boxed{9} \boxed{\cos^{-1}}$	19- 15 8
$\boxed{\text{R}} \blacktriangleleft$	09- 22	$\boxed{\text{GTO}} 00$	20- 13 00
$\boxed{\times}$	10- 61		

REGISTERS

$R_0 \Sigma a_i^2$	$R_1 \Sigma b_i^2$	$R_2 \Sigma a_i b_i$	R_3
R_4	R_5	R_6	R_7

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program.			
2	Initialize		$\boxed{\text{f}} \boxed{\text{REG}} \boxed{\text{f}} \boxed{\text{PRGM}}$	
3	Perform for $i = 1, \dots, n$:			
	Key in a_i and b_i	a_i	$\boxed{\text{ENTER}} \blacktriangleleft$	
		b_i	$\boxed{\text{R/S}}$	
4	Find norm of $\vec{a}$		$\boxed{\text{RCL}} 0 \boxed{\text{f}} \boxed{\sqrt{x}}$	$ \vec{a} $
5	Find norm of $\vec{b}$		$\boxed{\text{RCL}} 1 \boxed{\text{f}} \boxed{\sqrt{x}}$	$ \vec{b} $
6	Find $ \vec{a} \cdot \vec{b} $		$\boxed{\text{RCL}} 2$	$ \vec{a} \cdot \vec{b} $
7	Calculate angle between $\vec{a}$ and $\vec{b}$		$\boxed{\text{GSB}} 13$	θ

Example:

Let $\vec{a} = (2, 5, 2)$
 $\vec{b} = (3, 3, -4)$

Solution:

$$|\vec{a}| = 5.7446$$

$$|\vec{b}| = 5.8310$$

$$\vec{a} \cdot \vec{b} = 13$$

$$\theta = 67.1635^\circ$$

Keystrokes

$\boxed{\text{f}} \boxed{\text{REG}} \boxed{\text{f}} \boxed{\text{PRGM}}$
 2 $\boxed{\text{ENTER}} \blacktriangleleft$ 3 $\boxed{\text{R/S}}$
 5 $\boxed{\text{ENTER}} \blacktriangleleft$ 3 $\boxed{\text{R/S}}$
 2 $\boxed{\text{ENTER}} \blacktriangleleft$ 4 $\boxed{\text{CHS}} \boxed{\text{R/S}}$
 $\boxed{\text{RCL}} 0 \boxed{\text{f}} \boxed{\sqrt{x}}$
 $\boxed{\text{RCL}} 1 \boxed{\text{f}} \boxed{\sqrt{x}}$
 $\boxed{\text{RCL}} 2$
 $\boxed{\text{GSB}} 13$

Display

5.7446
 5.8310
 13.0000
 67.1635

Numerical Methods

Newton's Method Solution to $f(x) = 0$

This program uses Newton's method to find a solution for $f(x) = 0$, where $f(x)$ is specified by the user.


The user must define the function $f(x)$ by keying into program memory the keystrokes required to find $f(x)$, assuming x is in the X-register. 20 program steps are available for defining $f(x)$; the program only uses registers R_0 through R_4 , the rest of the registers are available to the user.

The user must provide the program with an initial guess, x_1 , for the solution. The closer the initial guess is to the actual solution, the faster the program will converge to an answer. The program will halt when two successive approximations for x , say x_i and x_{i+1} , are within a tolerance ϵ , i.e., when $|x_{i+1} - x_i| < \epsilon$. The value for ϵ must be input by the user. In general a reasonable value for ϵ might be $10^{-6} x_1$.

Equations:

The basic formula used by Newton's method to generate the next approximation for the solution is

$$x_{i+1} = x_i - \frac{f(x_i)}{f'(x_i)}$$

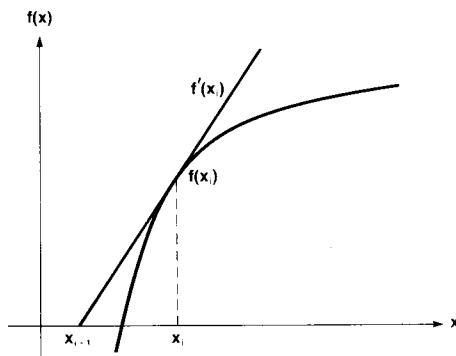

This program makes a numerical approximation for the derivative $f'(x)$ to give the following equation:

$$x_{i+1} = x_i - \delta_i \left[\frac{f(x_i + \delta_i)}{f(x_i)} - 1 \right]^{-1}$$

where: $\delta_i = 10^{-5} x_i$

Notes:

1. After the routine has finished calculating, the last value of $f(x)$ may be displayed by pressing **RCL** 4. If this value is not close enough to zero, the program may be run again with a smaller value for ϵ .
2. The user can watch the function converge to zero by making a slight change in the program. If the **9** **NOP** in line 45 is replaced by an **f** **PAUSE**, the program will pause during each iteration, displaying successive values of $f(x)$ which should be converging to zero. To make this change to a program that has already been keyed in, perform the following operations:

1. Press **GTO** 44
2. Switch to PRGM
3. Press **f** **PAUSE**
4. Switch to RUN
5. Press **f** **PRGM**

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
f CLEAR PRGM	00	g $\frac{1}{x}$	16- 15 3
RCL 1	01- 24 1	RCL 3	17- 24 3
GSB 25	02- 12 25	x	18- 61
STO 4	03- 23 4	STO $\frac{1}{x}$ 1	19- 23 41 1
RCL 1	04- 24 1	g ABS	20- 15 34
RCL 1	05- 24 1	RCL 2	21- 24 2
EEX	06- 33	f $x \leq y$	22- 14 41
5	07- 5	GTO 01	23- 13 01
$\div$	08- 71	GTO 49	24- 13 49
STO 3	09- 23 3		
+	10- 51		
GSB 25	11- 12 25	g NOP	45- 15 13
RCL 4	12- 24 4	g $x=0$	46- 15 71
$\div$	13- 71	GTO 49	47- 13 49
1	14- 1	g RTN	48- 15 12
$\frac{1}{x}$	15- 41	RCL 1	49- 24 1

REGISTERS

R_0	$R_1 x$	$R_2 \epsilon$	$R_3 \delta$
$R_4 f(x)$	R_5	R_6	R_7

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in lines 1-24 of the program			24- 13 49
2	Key in function $f(x)$			
3	Key in a branch to line 45		GTO 45	
4	Press SST until display shows line 44			
5	Key in lines 45-49 of program			
6	Switch to RUN			
7	Store initial guess for solution	x_1	STO 1	
8	Store tolerance	ϵ	STO 2	
9	Calculate solution		GSB 01	x_0
10	To change x_1 or ϵ go to appropriate step and store new value.			

Example:

An equation often solved by gear designers is

$$\tan x - x - I = 0$$

where x is an angle in radians and I is the involute of x . Find the angle x_0 corresponding to an involute of 0.0324.

Note:

Since a gear designer might want to calculate x for several values of I , it will be simpler to store I in R_7 for use by the function $f(x)$.

Solution:

$$x_0 = 25.62^\circ$$

$$\text{Last } f(x) = 1.30 \times 10^{-9}$$

Keystrokes **Display**

Switch to PRGM

(Key in lines 1-24 of the program)

f TAN f LST x

- RCL 7 -

GTO 45 SST

... (until display shows line 44)

(Key in lines 45-49 of the program)

Switch to RUN

g RAD .0324

STO 7

1 STO 1

EEX CHS 6 STO 2

GSB 01 0.4472

180 x g π ÷ 25.6211

RCL 4 1.3000-09

Numerical Integration, Simpson's Rule

Let $x_0, x_1, \dots, x_n$ be equally spaced points such that $x_i = x_0 + ih$ for $i = 0, 1, 2, \dots, n$ at which corresponding values $f(x_0), f(x_1), \dots, f(x_n)$ of a function $f(x)$ are known. This function need not be known explicitly but if it is, these values can be found previously by writing the function into memory and evaluating at the various points. n must be an even positive integer.

$$\int_{x_0}^{x_n} f(x) dx \approx \frac{h}{3} [f(x_0) + 4f(x_1) + 2f(x_2) + \dots + 4f(x_{n-1}) + f(x_n)]$$

Let the solution be indicated by I.

KEY ENTRY	DISPLAY
f CLEAR PRGM	00
RCL 0	01- 24 0
3	02- 3
÷	03- 71
STO 0	04- 23 0
x	05- 61
STO 1	06- 23 1
R/S	07- 74
GSB 18	08- 12 18
R/S	09- 74
4	10- 4
x	11- 61

KEY ENTRY	DISPLAY
GSB 18	12- 12 18
R/S	13- 74
2	14- 2
x	15- 61
GSB 18	16- 12 18
GTO 09	17- 13 09
RCL 0	18- 24 0
x	19- 61
STO + 1	20- 23 51 1
RCL 1	21- 24 1
g RTN	22- 15 12

REGISTERS

R ₀ h/3	R ₁ Σ	R ₂	R ₃
R ₄	R ₅	R ₆	R ₇

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program			
2	Store increment	h	STO 0	
3	Enter first function value	$f(x_0)$	GSB 01	Partial sum
4	Enter last function value	$f(x_n)$	R/S	Partial sum
5	Enter values $i = 1, 2, \dots, n-2$	$f(x_i)$	R/S	Partial sum
6	Enter value $i = n-1$	$f(x_{n-1})$	R/S	I

Example:

Compute $\int_0^{\pi} \sin^2 x \, dx$ using Simpson's rule with $h = \pi/8$.

The following data must be found first:

i	0	1	2	3	4	5	6	7	8
x_i	0	$\pi/8$	$\pi/4$	$3\pi/8$	$\pi/2$	$5\pi/8$	$3\pi/4$	$7\pi/8$	π
$f(x_i)$	0	0.1464	0.5	0.8536	1	0.8536	0.5	0.1464	0

Solution:

$$\int_0^{\pi} \sin^2 x \, dx \approx 1.5708$$

The exact solution is $\pi/2$.

Keystrokes**Display**

$\boxed{9}$ $\boxed{\pi}$ 8 $\boxed{+}$ $\boxed{STO}$ 0

0 $\boxed{GSB}$ 01 **0.0000**

0 $\boxed{R/S}$ **0.0000**

0.1464 $\boxed{R/S}$ 0.5

$\boxed{R/S}$ 0.8536 $\boxed{R/S}$ 1

$\boxed{R/S}$ 0.8536 $\boxed{R/S}$

0.5 $\boxed{R/S}$ 0.1464 $\boxed{R/S}$ **1.5708**

Analytical Geometry

Hyperbolic Functions

This program evaluates the six hyperbolic functions by the following formulas:

$$1. \quad \sinh x = \frac{e^x - e^{-x}}{2}$$

$$2. \quad \cosh x = \frac{e^x + e^{-x}}{2}$$

$$3. \quad \tanh x = \frac{e^x - e^{-x}}{e^x + e^{-x}}$$

$$4. \quad \operatorname{csch} x = \frac{1}{\sinh x} \quad (x \neq 0)$$

$$5. \quad \operatorname{sech} x = \frac{1}{\cosh x}$$

$$6. \quad \operatorname{coth} x = \frac{1}{\tanh x} \quad (x \neq 0)$$

KEY ENTRY	DISPLAY
$\boxed{f}$ CLEAR $\boxed{PRGM}$	00
$\boxed{9}$ $\boxed{e^x}$	01- 15 1
$\boxed{ENTER+}$	02- 31
$\boxed{9}$ $\boxed{1/x}$	03- 15 3
$\boxed{-}$	04- 41
2	05- 2
$\boxed{+}$	06- 71
$\boxed{GTO}$ 00	07- 13 00
$\boxed{9}$ $\boxed{e^x}$	08- 15 1
$\boxed{ENTER+}$	09- 31
$\boxed{9}$ $\boxed{1/x}$	10- 15 3
$\boxed{+}$	11- 51
$\boxed{GTO}$ 05	12- 13 05

KEY ENTRY	DISPLAY
$\boxed{9}$ $\boxed{e^x}$	13- 15 1
$\boxed{ENTER+}$	14- 31
$\boxed{9}$ $\boxed{1/x}$	15- 15 3
$\boxed{-}$	16- 41
$\boxed{ENTER+}$	17- 31
$\boxed{ENTER+}$	18- 31
$\boxed{f}$ LST X	19- 14 73
2	20- 2
$\boxed{\times}$	21- 61
$\boxed{+}$	22- 51
$\boxed{+}$	23- 71
$\boxed{GTO}$ 00	24- 13 00

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program			
2	$\sinh x$	x	$\boxed{GSB}$ 01	$\sinh x$
	or			
	$\cosh x$	x	$\boxed{GSB}$ 08	$\cosh x$
	or			
	$\tanh x$	x	$\boxed{GSB}$ 13	$\tanh x$
	or			
	$\operatorname{csch} x$	x	$\boxed{GSB}$ 01	
			$\boxed{9}$ $\boxed{1/x}$	$\operatorname{csch} x$
	or			
	$\operatorname{sech} x$	x	$\boxed{GSB}$ 08	
			$\boxed{9}$ $\boxed{1/x}$	$\operatorname{sech} x$
	or			
	$\operatorname{coth} x$	x	$\boxed{GSB}$ 13	
			$\boxed{9}$ $\boxed{1/x}$	$\operatorname{coth} x$

Examples:

- $\sinh 2.5 = 6.0502$
- $\cosh 3.2 = 12.2866$
- $\tanh 1.9 = 0.9562$
- $\operatorname{csch} 4.6 = 0.0201$
- $\operatorname{sech} (-.25) = 0.9695$
- $\operatorname{coth} (-2.01) = -1.0366$

Keystrokes	Display
2.5 GSB 01	6.0502
3.2 GSB 08	12.2866
1.9 GSB 13	0.9562
4.6 GSB 01 9 $\frac{1}{x}$	0.0201
.25 CHS GSB 08	
9 $\frac{1}{x}$	0.9695
2.01 CHS GSB 13	
9 $\frac{1}{x}$	-1.0366

Inverse Hyperbolic Functions

This program evaluates the inverse hyperbolic functions by the following formulas:

- $\sinh^{-1} x = \ln [x + (x^2 + 1)^{1/2}]$
- $\cosh^{-1} x = \ln [x + (x^2 - 1)^{1/2}] \quad x \geq 1$
- $\tanh^{-1} x = \frac{1}{2} \ln \left[\frac{1+x}{1-x} \right] \quad x^2 < 1$
- $\operatorname{csch}^{-1} x = \sinh^{-1} \left[\frac{1}{x} \right] \quad x \neq 0$
- $\operatorname{sech}^{-1} x = \cosh^{-1} \left[\frac{1}{x} \right] \quad 0 < x \leq 1$
- $\operatorname{coth}^{-1} x = \tanh^{-1} \left[\frac{1}{x} \right] \quad x^2 > 1$

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
f CLEAR PRGM	00	+	16- 51
ENTER*	01- 31	f LN	17- 14 1
ENTER*	02- 31	GTO 00	18- 13 00
x	03- 61	ENTER*	19- 31
1	04- 1	ENTER*	20- 31
+	05- 51	1	21- 1
f $\sqrt{x}$	06- 14 0	+	22- 51
+	07- 51	x²y	23- 21
f LN	08- 14 1	CHS	24- 32
GTO 00	09- 13 00	1	25- 1
ENTER*	10- 31	+	26- 51
ENTER*	11- 31	÷	27- 71
x	12- 61	f LN	28- 14 1
1	13- 1	2	29- 2
-	14- 41	÷	30- 71
f $\sqrt{x}$	15- 14 0	GTO 00	31- 13 00

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program			
2	$\sinh^{-1} x$	x	[GSB] 01	$\sinh^{-1} x$
	or			
	$\cosh^{-1} x$	x	[GSB] 10	$\cosh^{-1} x$
	or			
	$\tanh^{-1} x$	x	[GSB] 19	$\tanh^{-1} x$
	or			
	$\operatorname{csch}^{-1} x$	x	[9] [1/x] [GSB] 01	$\operatorname{csch}^{-1} x$
	or			
	$\operatorname{sech}^{-1} x$	x	[9] [1/x] [GSB] 10	$\operatorname{sech}^{-1} x$
	or			
	$\operatorname{coth}^{-1} x$	x	[9] [1/x] [GSB] 19	$\operatorname{coth}^{-1} x$

Example:

- $\sinh^{-1} (2.4) = 1.6094$
- $\cosh^{-1} (90) = 5.1929$
- $\tanh^{-1} (-.65) = -0.7753$
- $\operatorname{csch}^{-1} (2) = 0.4812$
- $\operatorname{sech}^{-1} (.4) = 1.5668$
- $\operatorname{coth}^{-1} (3.4) = 0.3031$

Keystrokes

- 2.4 **[GSB]** 01
 90 **[GSB]** 10
 .65 **[CHS]** **[GSB]** 19
 2 **[9]** **[1/x]** **[GSB]** 01
 .4 **[9]** **[1/x]** **[GSB]** 10
 3.4 **[9]** **[1/x]** **[GSB]** 19

Display

1.6094
5.1929
-0.7753
0.4812
1.5668
0.3031

Circle Determined by Three Points

This program calculates the center (x_0, y_0) and radius (r) of a circle given three non-collinear points.

The equation of a circle is:

$$(x - x_0)^2 + (y - y_0)^2 = r^2$$

x_0 and y_0 are solved from:

$$\begin{bmatrix} (x_1 - x_3) & (y_1 - y_3) \\ (x_1 - x_2) & (y_1 - y_2) \end{bmatrix} \begin{bmatrix} x_0 \\ y_0 \end{bmatrix} =$$

$$\begin{bmatrix} \frac{1}{2} [(x_1 - x_3)(x_1 + x_3) + (y_1 - y_3)(y_1 + y_3)] \\ \frac{1}{2} [(x_1 - x_2)(x_1 + x_2) + (y_1 - y_2)(y_1 + y_2)] \end{bmatrix}$$

$$\text{and } r = \sqrt{(x_1 - x_0)^2 + (y_1 - y_0)^2}$$

KEY ENTRY	DISPLAY
f CLEAR PRGM	00
ENTER ↵	01-- 31
RCL 1	02-- 24 1
-	03-- 41
CHS	04-- 32
R/S	05-- 74
x₂y	06-- 21
RCL 1	07-- 24 1
+	08-- 51
x	09-- 61
R/S	10-- 74
CLX	11-- 34
RCL 0	12-- 24 0
-	13-- 41
CHS	14-- 32
R/S	15-- 74
x₂y	16-- 21
RCL 0	17-- 24 0
+	18-- 51
x	19-- 61
R/S	20-- 74
RCL 7	21-- 24 7
RCL 2	22-- 24 2
x	23-- 61

KEY ENTRY	DISPLAY
RCL 4	24-- 24 4
RCL 5	25-- 24 5
x	26-- 61
-	27-- 41
STO 1	28-- 23 1
RCL 7	29-- 24 7
RCL 3	30-- 24 3
x	31-- 61
RCL 6	32-- 24 6
RCL 4	33-- 24 4
GSB 41	34-- 12 41
R/S	35-- 74
RCL 6	36-- 24 6
RCL 2	37-- 24 2
x	38-- 61
RCL 5	39-- 24 5
RCL 3	40-- 24 3
x	41-- 61
-	42-- 41
2	43-- 2
÷	44-- 71
RCL 1	45-- 24 1
÷	46-- 71
g RTN	47-- 15 12

REGISTERS

R_0 x_1	R_1 y_1 , Det	R_2 $(y_1 - y_2)$	R_3 used
R_4 $(x_1 - x_2)$	R_5 $(y_1 - y_3)$	R_6 used	R_7 $(x_1 - x_3)$

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program			
2	Store (x_1, y_1)	x_1	STO 0	
		y_1	STO 1	
3	Input (x_2, y_2) and calculate	x_2	ENTER ↵	
		y_2	ENTER ↵	
			GSB 01	
			STO 2 R/S	
			STO 3 R/S	
			STO 4 R/S	
			STO + 3	
4	Input (x_3, y_3) and calculate	x_3	ENTER ↵	
		y_3	ENTER ↵	
			GSB 01	
			STO 5 R/S	
			STO 6 R/S	
			STO 7 R/S	
			STO + 6	
5	Calculate y_0		GSB 21	y_0
6	Calculate x_0		R/S	x_0
7	Calculate r	x_1	- x₂y	
		y_1	- g ↵P	r
	NOTE: The stack should be maintained between step 2			
	to step 7.			

Example 1:

Find the equation of the circle that goes through the three points (1, 1) (3.5, -7.6), (12, 0.8).

Solution 1:

Center = (6.45, -2.08), $r = 6.26$

Equation: $(x - 6.45)^2 + (y + 2.08)^2 = (6.26)^2$

Keystrokes	Display
------------	---------

f FIX 2	
1 STO 0	
1 STO 1	
3.5 ENTER CHS ENTER GSB 01	7.6
STO 2	8.60
R/S STO 3	
R/S STO 4	
R/S STO + 3	-11.25
12 ENTER CHS ENTER GSB 01	0.8
STO 5	0.20
R/S STO 6	
R/S STO 7	
R/S STO + 6	-143.00
GSB 21	-2.08
R/S	6.45
1 - x₂y 1	
- g →P	6.26

Example 2:

Find the equation of the circle that passes through the three point (0, 1), (-1, 0), (0, -1).

Solution 2:

Center = (0, 0), $r = 1$

Equation: $x^2 + y^2 = 1$

Keystrokes	Display
------------	---------

f FIX 2	
0 STO 0	
1 STO 1	
1 CHS ENTER CHS ENTER GSB 01	0
STO 2	1.00
R/S STO 3	
R/S STO 4	
R/S STO + 3	-1.00
0 ENTER CHS ENTER CHS ENTER GSB 01	0
STO 5	2.00
R/S STO 6	
R/S STO 7	
R/S STO + 6	0.00
GSB 21	0.00
R/S	0.00
0 - x₂y 1	
- g →P	1.00

Intersection of Line and Line

This program calculates the point of intersection (x_p , y_p) of two lines, each of them is specified by two points, i.e., (x_1 , y_1), (x_1' , y_1') and (x_2 , y_2), (x_2' , y_2'). x_p and y_p are calculated from the equation of straight line $y = x \tan \theta + c$. i.e., by solving:

$$\begin{bmatrix} 1 & -\tan \theta_1 \\ 1 & -\tan \theta_2 \end{bmatrix} \begin{bmatrix} y_p \\ x_p \end{bmatrix} = \begin{bmatrix} c_1 \\ c_2 \end{bmatrix}$$

“Error 0” will be displayed if two lines have the same slope, i.e., if there are either parallel or overlapping.

KEY ENTRY	DISPLAY	KEY ENTRY	DISPLAY
f CLEAR PRGM	00	$\div$	24- 71
GSB 37	01- 12 37	R/S	25- 74
STO 3	02- 23 3	RCL 4	26- 24 4
RCL 2	03- 24 2	RCL 5	27- 24 5
RCL 1	04- 24 1	CHS	28- 32
RCL 3	05- 24 3	x	29- 61
x	06- 61	RCL 3	30- 24 3
=	07- 41	RCL 6	31- 24 6
STO 4	08- 23 4	x	32- 61
R/S	09- 74	+	33- 51
GSB 37	10- 12 37	RCL 7	34- 24 7
STO 5	11- 23 5	$\div$	35- 71
RCL 2	12- 24 2	R/S	36- 74
RCL 1	13- 24 1	STO 1	37- 23 1
RCL 5	14- 24 5	=	38- 41
x	15- 61	STO 0	39- 23 0
=	16- 41	R*	40- 22
STO 6	17- 23 6	STO 2	41- 23 2
RCL 4	18- 24 4	=	42- 41
=	19- 41	RCL 0	43- 24 0
RCL 3	20- 24 3	g →P	44- 15 4
RCL 5	21- 24 5	R*	45- 22
=	22- 41	f TAN	46- 14 9
STO 7	23- 23 7	g RTN	47- 15 12

REGISTERS

R_0 used	R_1 x_1', x_2'	R_2 y_1', y_2'	R_3 $\tan \theta_1$
R_4 c_1	R_5 $\tan \theta_2$	R_6 c_2	R_7 Det

STEP	INSTRUCTIONS	INPUT DATA/UNITS	KEYS	OUTPUT DATA/UNITS
1	Key in the program			
2	Input the first line by two points	x_1	ENTER*	
		x_1'	ENTER*	
		y_1	ENTER*	
		y_1'	GSB 01	c_1
3	Input the 2 nd line by two points and calculate the intersection	x_2	ENTER*	
		x_2'	ENTER*	
		y_2	ENTER*	
		y_2'	GSB 10	x_p
			R/S	y_p
4	For a new pair of lines, go to step 2.			

Example:

Find the intersection of the lines defined by the points (4, 8), (-1, -2) and (-3, 9), (7, -1).

Solution:

$$x_p = 4, y_p = 2$$

Keystrokes

4 **ENTER*** 1
CHS **ENTER*** 8
ENTER* 2 **CHS**
GSB 01
3 **CHS** **ENTER*** 7
ENTER* 9 **ENTER*** 1
CHS **GSB** 10
R/S

Display

0.0000

4.0000

2.0000

Scan Copyright ©
The Museum of HP Calculators
www.hpmuseum.org

Original content used with permission.

Thank you for supporting the Museum of HP
Calculators by purchasing this Scan!

Please to not make copies of this scan or
make it available on file sharing services.